

Technical data sheet

Surge protection for LED systems ÜSM-20-230I1P+PE



Item number: 5092431



Surge protection module type 2+3 to DIN EN 61643-11 for 230/400 V power grids.

Appropriate for the protection of LED lighting.

- With function display and switch-off of the load circuit when an SPD fails
- Small size for the installation in the pole connection box or upstream of the LED driver
- 1+NPE protective circuit with a maximum discharge capacity of 20 kA
- Reduction of overvoltage to under 1,300 V or 1,000 V @ 5 kA
- With or without luminaire switch-off in case of defect

Application: In the cable transition box, junction boxes, cable duct to underfloor systems

To protect electronic devices such as LED luminaires against surge voltages



Master data

Item number	5092431
Description 1	Surge protective Modul
Description 2	for LED lights with 1 phase
Manufacturer	OBO
Dimension	230V
Smallest sales unit	1
Unit of quantity	Piece
Weight	4.1 kg
Weight unit	kg/100 pc.


Technical data sheet

Surge protection for LED systems ÜSM-20-230I1P+PE




Item number: 5092431

Dimensions

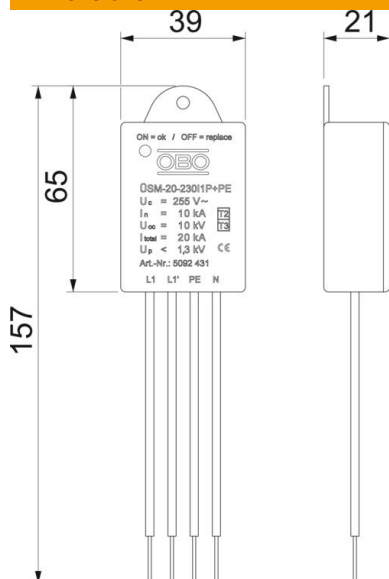

Length	155 mm
Width	40 mm
Height	21 mm

Technical data

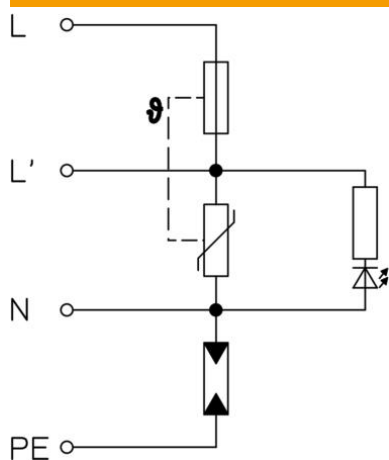

Arrester surge current (8/20 μ s) [total]	20 kA
Connecting cable length	0.09 m
Response time	<25 ns
Version for	1-pole + NPE for PC I
Pole version	1+N/PE
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Combined voltage protection level [L-PE]	1.5 kV
Maximum continuous voltage (L-N)	255 V
Maximum continuous voltage (N-PE)	255 V
Maximum continuous voltage AC	255 V
Lightning protection zone LPZ	1→2
Max. mains-side overcurrent protection	16
Maximum back-up fuse	16 A
Maximum discharge current (8/20 μ s)	20 kA
Maximum discharge current (8/20 μ s) [L-N]	10 kA
Maximum discharge current (8/20 μ s) [N-PE]	10 kA
Installation type	Miscellaneous
Nominal discharge current (8/20 μ s)	10 kA
Nominal discharge current (8/20 μ s) [L-N]	10 kA


Technical data sheet

Surge protection for LED systems ÜSM-20-230I1P+PE



Item number: 5092431

Technical data

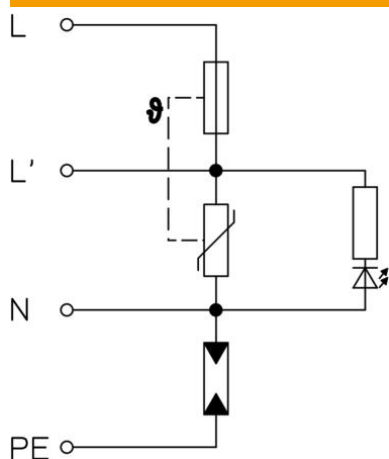

Nominal discharge current (8/20 µs) [N-PE]	10 kA
Nominal voltage AC (50/60 Hz)	230 V
OBO_Nominal load current (input/output terminal)	16 A
Test class, type 2	yes
Test class, type 3	yes
Protection rating	IP20
Protection level	1,3
Protection level [L-N]	≤1,3
Signalling on device	Visual
SPD to EN 61643-11	Type 2+3
SPD to IEC 61643-1	Class II+III