Technical data sheet Reduction, PG thread

Item number: 2089351






Reduction (Part H) to DIN 46320, with Pg thread to DIN 40430, as a transition from a PG thread hole to a smaller cable gland. * Prices according to DEL notation.

- IVI 3	aster	nata

Item number	2089351
Туре	167 R MS PG36-29
Description 1	Reduction
Manufacturer	OBO
Dimension	PG36-PG29
Material	Brass
Surface	Nickel-plated
Surface standard	
Smallest sales unit	25
Unit of quantity	Piece
Weight	6.98 kg
Weight unit	kg/100 pc.
CO Footprint (GWP) Cradle-to- Gate	0,0069 kg COe / 1 Piece

Item number: 2089351



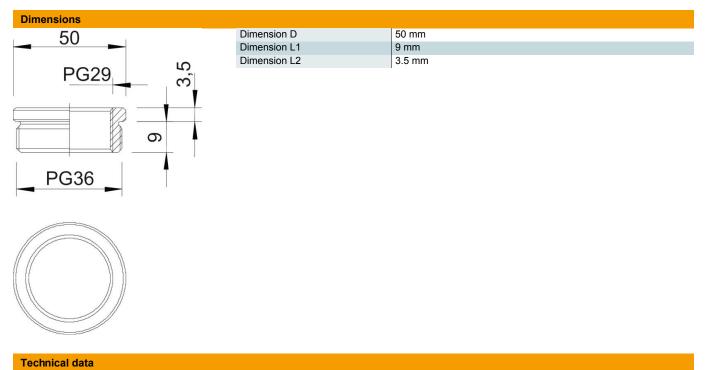

explosion-proof	no
Thread type: External thread	PG
Thread type: Internal thread	PG
Thread length	9 mm
Thread dimension, PG, external	36
Thread dimension, PG, internal	29
Nickel-plated	yes