

# Technical data sheet

Service outlet with tube body and handle clamp, GES R2,  
deep black

Item number: 7408857



Service outlet with tube body and handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.

The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when in use.



|           |               |
|-----------|---------------|
| <b>Zn</b> | Die-cast zinc |
| <b>P</b>  | Powder-coated |

## Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 7408857                  |
| Type                               | GES R2T KP               |
| Description 1                      | Floor socket             |
| Description 2                      | with tube                |
| Manufacturer                       | OBO                      |
| Dimension                          | 140 mm                   |
| Colour                             | Jet black; RAL 9005      |
| Material                           | Die-cast zinc            |
| Surface                            | Powder-coated            |
| Surface standard                   |                          |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 100.612 kg               |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,9092 kg CO2e / 1 Piece |


# Technical data sheet

Service outlet with tube body and handle clamp, GES R2,  
deep black

Item number: 7408857



## Dimensions

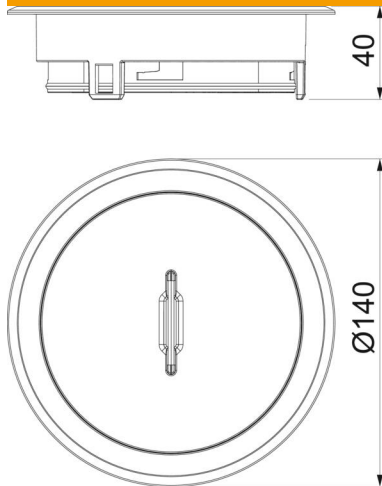

## Technical data

|                                        |                     |
|----------------------------------------|---------------------|
| Version for                            | Round               |
| Cable outlet version                   | Lowerable tube body |
| Floor covering protection frame        | yes                 |
| Floor care                             | Wet                 |
| Suitable for raised floor installation | yes                 |
| Suitable for cavity floor installation | yes                 |
| Suitable for wet care                  | yes                 |
| Suitable for underfloor ducts          | no                  |
| With floor covering recess             | no                  |
| Standard                               | EN 50085-2-2        |
| Protection rating (IP) when used       | IP20                |
| Protection rating (IP) when unused     | IP66                |
| Protection rating IK code              | IK10                |
| Vertical load, large area              | to 15,000 N         |
| Vertical load, small area              | to 3,000 N          |
| Approvals                              | VDE                 |
| Opening mechanism                      | Handle              |