

Technical data sheet

MS4141 mounting rail, slot 22 mm, A2, side perforation

Item number: 1123018



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



- A2 Stainless steel
- 2B Bright, treated

Master data		
Item number	1123018	
Type	MSL4141PP6000A2	
Description 1	Profile rail	
Description 2	perforated, slot 22mm	
Manufacturer	OBO	
Dimension	6000x41x41	
Material	Stainless steel	
Surface	Bright, treated	
Surface standard		
Smallest sales unit	6	
Unit of quantity	Metre	
Weight	179.4 kg	
Weight unit	kg/100 m	
CO Footprint (GWP) Cradle-to-Gate	10,1806 kg COe / 1 Meter	


Technical data sheet

MS4141 mounting rail, slot 22 mm, A2, side perforation

Item number: 1123018



Dimensions

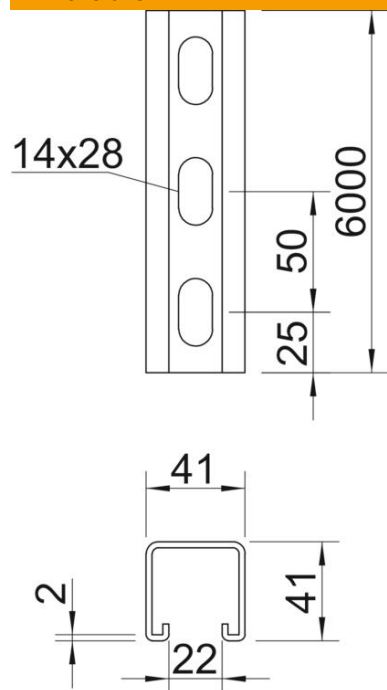

Length	6,000 mm
Width	41 mm
Height	41 mm
Dimension L	6,000 mm

Technical data

Breakable	no
Type of perforation	3 sides perforated
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Hole size	14x28 mm
Material thickness	2 mm
With perforation	yes
With tothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	2.01 cm ²
Static value I _y	5.13 cm
Static value I _z	5.88 cm
Static value W _y	2.51 cm ²
Static value W _z	2.69 cm ²