

Technical data sheet

Height-adjustable cassette for inspection opening, RKR-NUZD3, stainless steel
Item number: 7409150



Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R7 in dry or wet-cleaned floors for indoor use, for mounting in underfloor boxes UZD350, either in conjunction with a blanking lid DUG...R7 or in UZD350. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Height-adjustable cassette as a blind cassette, 3-compartment. 2 APMT2 cover plates and 1 APMT5 cover plate can be installed. For the installation of 2 UT3 universal supports and one UT4 universal support for 7 individual installation devices with support ring/support clamp or 10 Modul 45 devices.



A2 Stainless steel

Master data


Item number	7409150
Type	RKRNUZD R7VS25
Description 1	Round cassette
Description 2	blank
Manufacturer	OBO
Dimension	Ø275mm
Material	Stainless steel 1.4301
Smallest sales unit	1
Unit of quantity	Piece
Weight	294 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	14,2844 kg CO2e / 1 Piece

Technical data sheet

Height-adjustable cassette for inspection opening, RKR-NUZD3, stainless steel
Item number: 7409150



Dimensions

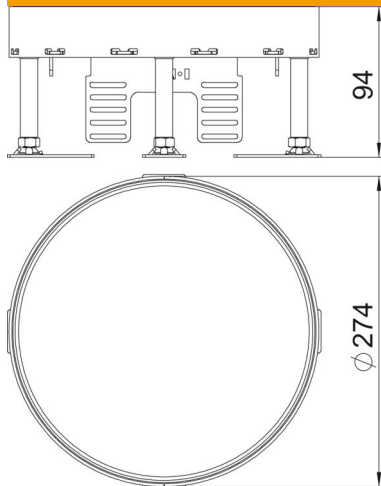

Length	274 mm
Width	274 mm
Height	94 mm
Dimension h	94 mm

Technical data

Number of installable devices	0
Number of cable outlets	0
Cover version	Round
Floor care	Wet
Decouplable	yes
Floor height, min.	94 mm
Suitable for raised floor installation	no
Suitable for cavity floor installation	no
Suitable for underfloor box	350
Device support to accept mounting boxes	no
Nominal size for device installation units	R7
ROHS-conformant	yes
Protection rating (IP) when used	IP00
Protection rating (IP) when unused	IP44
Protection rating IK code	IK10
Heavy-duty version	no
Installation system type	UT3 / UT4
Vertical load, large area	to 3,000 N
Vertical load, small area	to 3,000 N
Approvals	VDE
Floor covering thickness	25 mm