


Technical data sheet

Height-adjustable cassette with cord outlet, RKSRNUZD3, stainless steel

Item number: 7409300

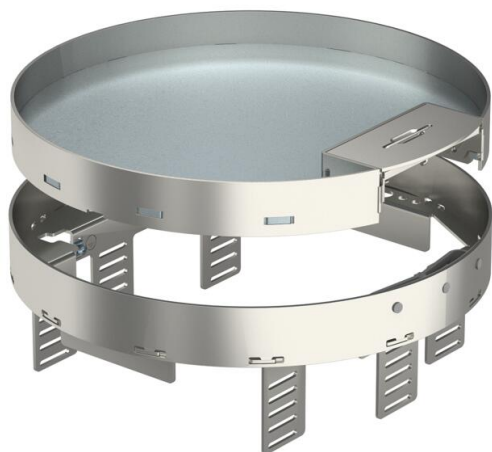

Height-adjustable cassette, decoupled from the floor, of nominal size R7, with cord outlet, for the installation of accessories in dry-cleaned floors for indoor use, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R7 or UGD350-3R7. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable cassette for cord outlet, 3-compartment. 2 APMT2 cover plates and 1 APMT5 cover plate can be installed. For the installation of 2 UT3 universal supports and one UT4 universal support for 7 individual installation devices with support ring/support clamp or 10 Modul 45 devices.



A2 Stainless steel

Master data

| | |
|---------------------|------------------|
| Item number | 7409300 |
| Type | RKSRN2UZD3R7VS25 |
| Description 1 | Round cassette |
| Description 2 | with cord outlet |
| Manufacturer | OBO |
| Dimension | Ø275mm |
| Material | Stainless steel |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 302 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Height-adjustable cassette with cord outlet, RKSRNUZD3,
stainless steel

Item number: 7409300



Dimensions

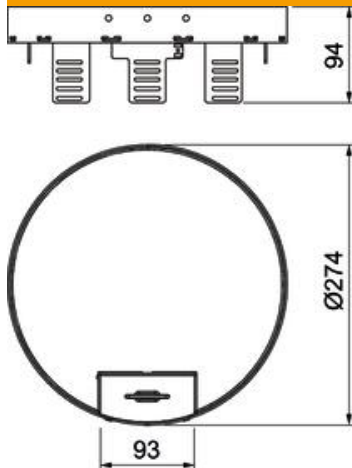

| | |
|--------|--------|
| Length | 274 mm |
| Width | 274 mm |
| Height | 94 mm |

Technical data

| | |
|--|-------------------------|
| Number of installable devices | 10 |
| Number of mounting boxes | 3 |
| Number of cable outlets | 1 |
| Version for | Round |
| Cable outlet version | Swivellable cord outlet |
| Floor care | Dry |
| Decouplable | yes |
| Floor height, min. | 94 mm |
| Suitable for raised floor installation | no |
| Suitable for cavity floor installation | no |
| Suitable for underfloor box | 350 |
| Device support to accept mounting boxes | yes |
| Nominal size for device installation units | R7 |
| Protection rating (IP) when used | IP20 |
| Protection rating (IP) when unused | IP40 |
| Protection rating IK code | IK10 |
| Heavy-duty version | no |
| Installation system type | UT3 / UT4 |
| Vertical load, large area | to 3,000 N |
| Vertical load, small area | to 2,500 N |
| Approvals | VDE |
| Floor covering thickness | 25 mm |