


# Technical data sheet

## Chuck jaw, light duty TKH FT

Item number: 6355812

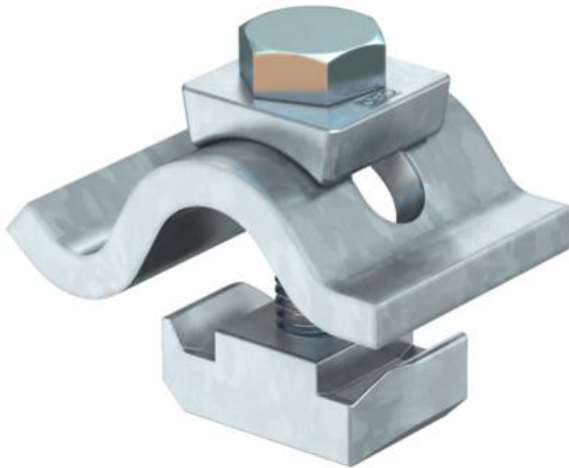

Light-duty chuck jaw with slide nut for fixing profile rails to steel girder flanges. The clamping range of the chuck jaw is limited to the maximum fastening thickness, 25 mm.

The chuck jaw is used in combination with profile rails of slot width 22 mm.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                     |                        |
|---------------------|------------------------|
| Item number         | 6355812                |
| Description 1       | Tensioning claw, light |
| Description 2       | with sliding nut       |
| Manufacturer        | OBO                    |
| Dimension           | M10x50                 |
| Colour              | zinc                   |
| Material            | Steel                  |
| Surface             | Hot-dip galvanised     |
| Surface standard    | DIN EN ISO 1461        |
| Smallest sales unit | 10                     |
| Unit of quantity    | Pair                   |
| Weight              | 46 kg                  |
| Weight unit         | kg/100 pairs           |


# Technical data sheet

## Chuck jaw, light duty TKH FT

Item number: 6355812



### Dimensions

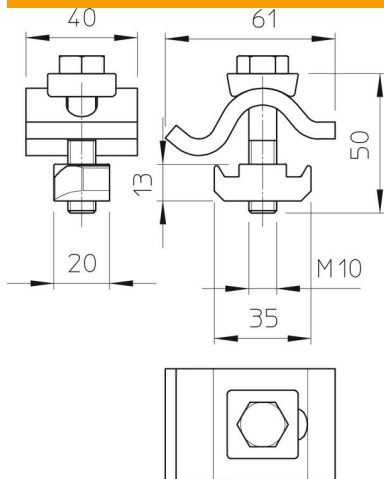

|        |       |
|--------|-------|
| Height | 25 mm |
|--------|-------|

### Technical data

|                                     |          |
|-------------------------------------|----------|
| F in kN                             | 10 kN    |
| Suitable for flange thickness, max. | 25 mm    |
| Suitable for flange thickness, min. | 15 mm    |
| Thread metric                       | 10       |
| Bolt                                | M10 x 25 |