Technical data sheet

UDHOME2 floor socket, with cord outlet, without floor covering recess, 2x VDE, stainless steel Item number: 7368326





Square floor socket for use in dry-care cavity and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 100 mm, the height-adjustment range 35 mm.Frame and cover made of stainless steel and visible in the floor covering. With 2 Modul 45® sockets in the mounting support and an optional data technology support for up to 2 data connection modules. The load-bearing capacity of 15 kN is only guaranteed when in an unused state.





Stainless steel


Master data

Item number	7368326
Type	UDHOME2 GVV
Description 1	Floor socket
Description 2	with double VDE socket
Manufacturer	OBO
Dimension	140x140x110
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	220 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	13,3393 kg COe / 1 Piece

Technical data sheet

UDHOME2 floor socket, with cord outlet, without floor covering recess, 2x VDE, stainless steel Item number: 7368326



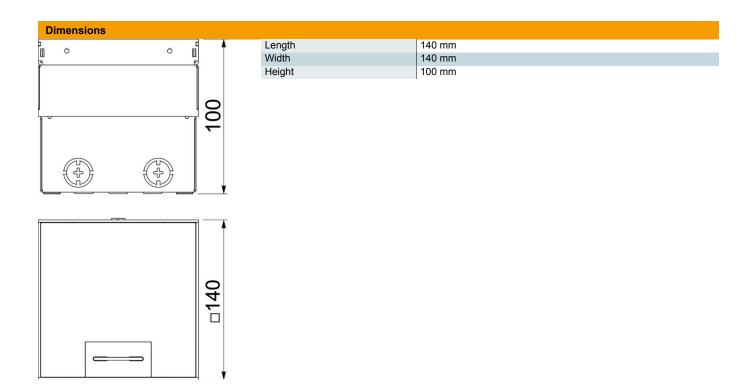

l echnical data		
	Number of installable devices	2
	Version for	Square
	Cable outlet version	Swivellable cord outlet
	Equipment	Double VDE socket
	Floor covering protection frame	no
	Floor care	Dry
	Cover version	Decorative plate
	Application when used	6.101.1 Dry floor care
	Application when unused	6.101.1 Dry floor care
	Floor height, max.	135 mm
	Floor height, min.	100 mm
	Suitable for raised floor installation	yes
	Suitable for screed-flush closed underfloor ducts	no
	Suitable for screed-covered underfloor ducts	no
	Suitable for cavity floor installation	yes
	Suitable for wet care	no
	Suitable for underfloor ducts	no
	Device support to accept mounting boxes	no
	With floor covering recess	no
	Nominal size for device installation units	2

Technical data sheet

UDHOME2 floor socket, with cord outlet, without floor covering recess, 2x VDE, stainless steel Item number: 7368326



Technical data		
	Standard	EN 50085-2-2
	Frame version	Floor covering contact edge
	Protection rating (IP) when used	IP20
	Protection rating (IP) when unused	IP40
	Protection rating IK code	IK10
	Heavy-duty version	no
	Vertical load, small area	to 3,000 N
	Approvals	VDE
	Opening mechanism	Handle