


# Technical data sheet

3-wire connection cable, PVC, cross-section 2.5 mm<sup>2</sup>, 1 m length, white  
Item number: 6108712



Connection cable 3 x 2.5 mm<sup>2</sup> in the version socket-connector, type WINSTA® MIDI.

PVC hose pipe: H05VV-F 3 x 2.5 mm<sup>2</sup>  
Suitable for connection of ready-for-connection universal supports Connect UTC to an energy distributor.

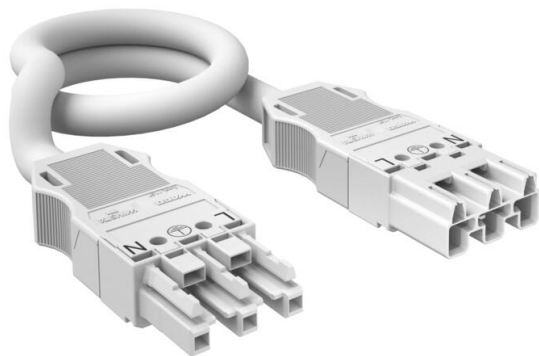

PA Polyamide

| Master data         |                               |  |
|---------------------|-------------------------------|--|
| Item number         | 6108712                       |  |
| Type                | VL-WIN 3P2.5 1W               |  |
| Description 1       | Connection cable              |  |
| Description 2       | 3x2,5mm <sup>2</sup> , WINSTA |  |
| Manufacturer        | OBO                           |  |
| Dimension           | 1000x27x15                    |  |
| Colour              | White                         |  |
| Material            | Polyamide                     |  |
| Smallest sales unit | 1                             |  |
| Unit of quantity    | Piece                         |  |
| Weight              | 17.82 kg                      |  |
| Weight unit         | kg/100 pc.                    |  |

| Dimensions |  |
|------------|--|
|            |  |

# Technical data sheet

3-wire connection cable, PVC, cross-section 2.5 mm<sup>2</sup>, 1 m length, white

Item number: 6108712



## Technical data

|                                     |                     |
|-------------------------------------|---------------------|
| Number of poles                     | 3                   |
| Type of terminated cable            | Connection cable    |
| Type of locking                     | Separate            |
| Version, page 1                     | socket              |
| Version, page 2                     | Connector           |
| Rated surge voltage                 | 4                   |
| Fire load                           | 0.88                |
| Colour of the coding/contact insert | White               |
| Halogen-free                        | no                  |
| Cable type                          | H05VV-F             |
| Cable length                        | 1000 mm             |
| Jacket colour                       | White               |
| Mechanical encoding                 | yes                 |
| Nominal voltage                     | 250 V               |
| Nominal current                     | 20 A                |
| Pin labelling                       | L, N, PE            |
| Cross-section                       | 1.5 mm <sup>2</sup> |
| Protection rating                   | IP20                |
| Degree of soiling                   | 3                   |