


# Technical data sheet

## T branch piece 160 FT

Item number: 6229778

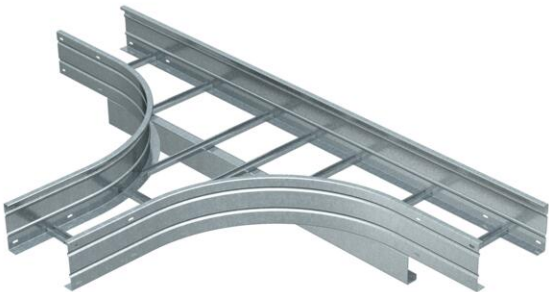

Horizontal T branch piece, for all wide span cable ladders of 160 mm side height.  
For further stabilisation, additional supports should be planned for the area of the fittings.




|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                                |
|------------------------------------|--------------------------------|
| Item number                        | 6229778                        |
| Type                               | WLT 1660 FT                    |
| Description 1                      | T-branch piece                 |
| Description 2                      | for wide span cable ladder 160 |
| Manufacturer                       | OBO                            |
| Dimension                          | 160x600                        |
| Colour                             | zinc                           |
| Material                           | Steel                          |
| Surface                            | Hot-dip galvanised             |
| Surface standard                   | DIN EN ISO 1461                |
| Smallest sales unit                | 1                              |
| Unit of quantity                   | Piece                          |
| Weight                             | 3040 kg                        |
| Weight unit                        | kg/100 pc.                     |
| CO2 Footprint (GWP) Cradle-to-Gate | 87,0869 kg CO2e / 1 Piece      |

### Dimensions

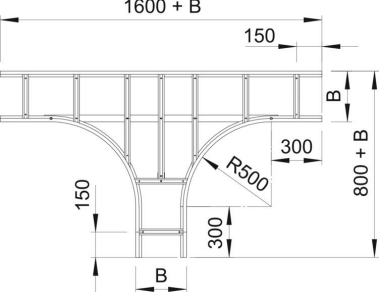

|             |        |
|-------------|--------|
| Width       | 600 mm |
| Height      | 160 mm |
| Dimension B | 600 mm |
| Dimension R | 500 mm |

# Technical data sheet

T branch piece 160 FT

Item number: 6229778



## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Version of the rungs          | Profile unperforated |
| Side rail version             | Flat profile         |
| Maintain electrical functions | no                   |
| Rustproof steel, pickled      | no                   |
| Wide-span version             | yes                  |
| Rail thickness                | 2 mm                 |