Technical data sheet

GTPL hat profile rail, perforated

Item number: 1115669

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).



St Steel

GTP Electrogalvanised, transparently-passivated

Master data


Item number	1115669
Type	2069 2M GTPL
Description 1	Top hat rail
Description 2	perforated
Manufacturer	OBO
Dimension	2000x35x7,5
Material	Steel
Surface Surface standard	Electrogalvanised, transparently-passivated
Smallest sales unit	2
Unit of quantity	Metre
Weight	33.28 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	0,6257 kg CO2e / 1 Meter

Technical data sheet

GTPL hat profile rail, perforated

Item number: 1115669

Dimensions

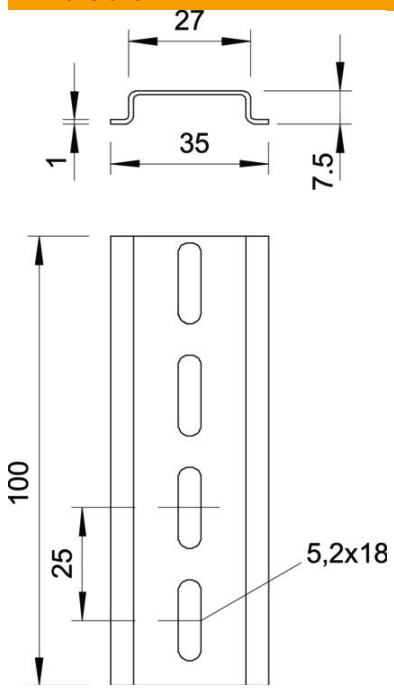

Length	2,000 mm
Width	35 mm
Height	7.5 mm

Technical data

Version for	Perforated
Version, rails	Support rail DIN EN 60715
Drill hole spacing, centre	25 mm
Bundle	50 m
Hole shape (ETIM)	Long slot
Material thickness	1 mm
ROHS-conformant	yes