Technical data sheet

Cable and pipe spacer clip 732 with threaded connection

Item number: 1360051



Mounting with screw-in spacer clips. Spacer clips and screw-in spacer clips are available in various materials: in V2A stainless steel, in electrogalvanised, hot-dip galvanised steel or in aluminium. Fastening can take place with bolt ties or angler anchors and Sprint screws.

Depending on the design, the clips can be "shot" using a bolt-firing tool or nail device.

CE RoHS conform

St Steel

GTP Electrogalvanised, transparently-passivated

Master data


Item number	1360051
Type	732 6 GTP
Description 1	Distance saddle
Description 2	with threaded connection M6
Manufacturer	OBO
Dimension	5-6mm
Material	Steel
Surface Surface standard	Electrogalvanised, transparently-passivated
Smallest sales unit	100
Unit of quantity	Piece
Weight	1.16 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0375 kg COe / 1 Piece

Technical data sheet

Cable and pipe spacer clip 732 with threaded connection

Item number: 1360051

Dimensions

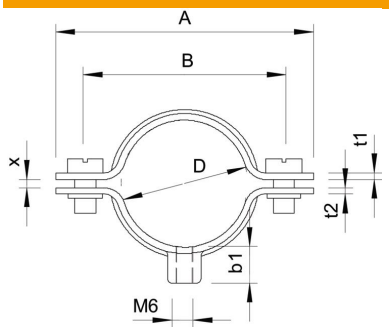

Length	35 mm
Dimension A	35 mm
Dimension B	23 mm
Dimension b1	8 mm
Dimension t1 (mm)	1 mm
Dimension t2 (mm)	1.25 mm
Dimension x	1 mm

Technical data

Distance to the wall	yes
Number of cables/pipes	1
Version for	Closed
Fastening type	Threaded connection
For diameter	5-6
Suitable in fire protection area	yes
Size	-
Halogen-free	yes
Plastic-covered	no
Hole size	M6
Material thickness	1 mm
ROHS-conformant	yes
Bolt	M5 x 10
Clamping range D, max.	6 mm
Clamping range D, min.	5 mm
UV-resistant	yes