# Technical data sheet

## Quick pipe connecting sleeve, light grey

## Item number: 2154081




Connection sleeve for plastic electrical installation pipes to create straight connections. Suitable for Quick pipe pipes or corrugated pipes. Toolless closing and opening. Can be used in a temperature range of –25 to +60 °C.

HALOGEN FREE IP 40 M

PP Polypropylene

### Master data


| | |
|---|---|
| Item number | 2154081 |
| Type | 3000 MMS M16 LGR |
| Description 1 | Quick pipe connecting sleeve |
| Manufacturer | OBO |
| Dimension | M16 |
| Colour | Light grey; RAL 7035 |
| Material | Polypropylene |
| Smallest sales unit | 10 |
| Unit of quantity | Piece |
| Weight | 0.299 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,026 kg CO2e / 1 Piece |

# Technical data sheet

## Quick pipe connecting sleeve, light grey

## Item number: 2154081

### Dimensions

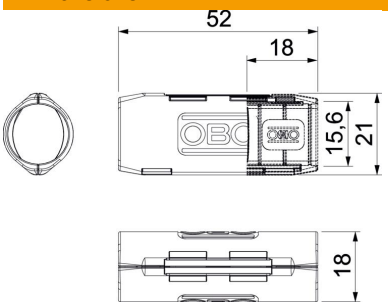


| | |
|---|---|
| Dimension B | 21 mm |
| Dimension d | 15.6 mm |
| Dimension L | 52 mm |
| Dimension L1 | 18 mm |

### Technical data

| | |
|---|---|
| Size | M16 |
| Halogen-free | yes |
| Polished surface | no |
| ROHS-conformant | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | 0 °C |