Technical data sheet

Equipotential busbar, simple version

Item number: 5015014



- Clamp and crossbar, electrogalvanised steel
- Clamping element and contact strip, brass, screws, hot dipped galvanised steel

Connection options:


- 8 x cables to 25 mm²
- 1 x round conductor Rd 8-10
- 1 x flat conductor to FL 40

CuZn 37 Brass

Master data

Item number	5015014
Type	1808
Description 1	Equipotential busbar
Manufacturer	OBO
Dimension	300mm
Material	Brass
Smallest sales unit	1
Unit of quantity	Piece
Weight	67 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,5903 kg CO2e / 1 Piece

Dimensions

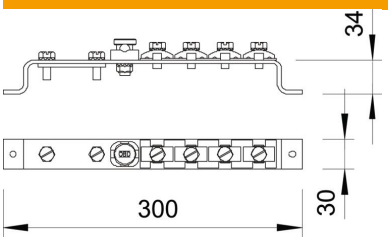

Length	300 mm
Width	30 mm
Height	34 mm

Technical data sheet

Equipotential busbar, simple version

Item number: 5015014

Technical data

Quantity of flat conductor connections up to 30 mm	0
Quantity of flat conductor connections up to 40 mm	1
Quantity of cable connections up to 16 mm², rigid	0
Quantity of cable connections up to 25 mm², rigid	8
Quantity of cable connections up to 6 mm², rigid	0
Quantity of cable connections up to 95 mm², rigid	0
Quantity of round conductor connections 10 mm	0
Quantity of round conductor connections 8 mm	0
Quantity of round conductor connections 8-10 mm	1
Quantity of round conductor connections, total	1
Version for	Without cover hood
Type	Fixed structure
Insulator	no
Surface of the terminal	Nickel-plated
Surface of the contact rail	Nickel-plated
ROHS-conformant	yes
Material of the terminal	Brass
Material of the contact rail	Brass