Technical data sheet

Stainless steel flat conductor A4

Item number: 5018706




- Can be used as an earthing conductor according to DIN EN 62561-2 (VDE 0185-561-2)
- Corresponds to the requirements of VDE 0185-305 (IEC 62305)
- According to the foundation earth electrode standard DIN 18014, V4A is required in the earth
- For use in areas at risk of corrosion
- For lightning protection, earthing systems and ring equipotential bonding

A4 Stainless steel

Master data

Item number	5018706
Type	5052 V4A 30X3.5
Description 1	Steel strip
Description 2	50 m ring
Manufacturer	OBO
Dimension	30x3,5mm
Material	Stainless steel 1.4571/1.4404
Smallest sales unit	50
Unit of quantity	Metre
Weight	82.425 kg
Weight unit	kg/100 m

Dimensions

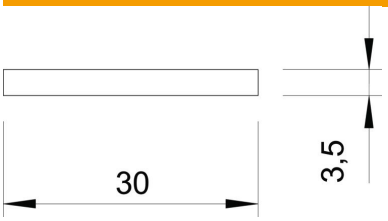

Width	30 mm
Height	3.5 mm
Dimension B	30 mm
Dimension H	3.5 mm

Technical data sheet

Stainless steel flat conductor A4

Item number: 5018706

Technical data

Nomal ring (approx. kg)	42
Nomal ring (approx. m)	50
Length tolerance ±	5 %
Cross-section	105 mm²
ROHS-conformant	yes