# Technical data sheet

## Roof conductor holder for tiled, slated and corrugated roofs, with crossbar
## Item number: 5202248



- With weatherproof clamping collar from soft PVC
- Required drill hole Ø = 16 mm
- Spacer from polyamide, grey

PA Polyamide


### Master data

| | |
|---|---|
| Item number | 5202248 |
| Type | 133 A |
| Description 1 | Roof conductor holder |
| Description 2 | with over-piece |
| Manufacturer | OBO |
| Dimension | 8-10 mm |
| Material | Polyamide |
| Smallest sales unit | 20 |
| Unit of quantity | Piece |
| Weight | 8.217 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2819 kg CO2e / 1 Piece |

# Technical data sheet

## Roof conductor holder for tiled, slated and corrugated roofs, with crossbar
## Item number: 5202248

### Dimensions

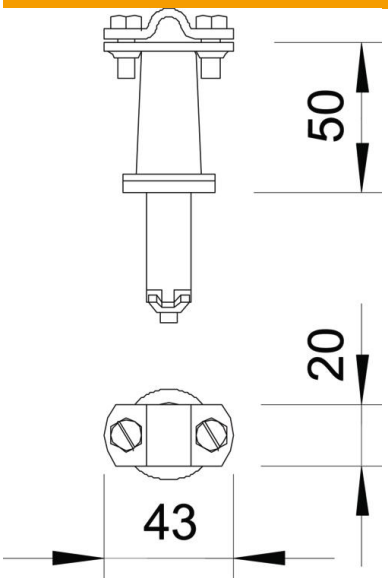


| | |
|---|---|
| Length | 43 mm |
| Width | 20 mm |
| Height | 50 mm |

### Technical data

| | |
|---|---|
| Application | Corrugated roof |
| Conductor fastening type | With screw clip |
| Conductor diameter, max. | 10 |
| Conductor diameter, min. | 8 |
| Mounting type | Miscellaneous |
| Mounting height | 50 mm |
| Fit | Rd 8-10 mm |
| ROHS-conformant | yes |
| Material of the holder | Plastic |
| Material of the support | Plastic |