
# Technical data sheet

## Cross-connector Rd 8−10 mm

## Item number: 5312592

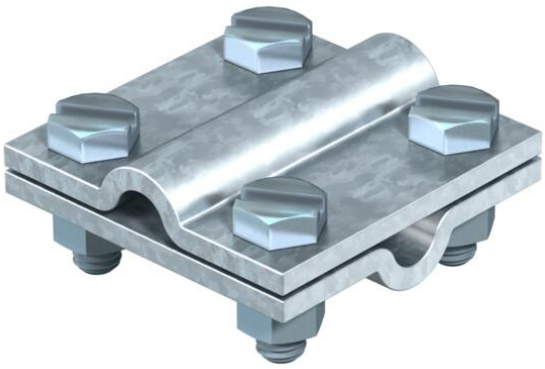

- Meets the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)
- Fit: Rd 8–10 x Rd 8–10
- Mounted with 4 hexagonal bolts M8 x 25 and 4 hexagonal nuts M8 (F)

| | |
|---|---|
| St | Steel |
| FT | Hot-dip galvanised |

### Master data


| | |
|---|---|
| Item number | 5312592 |
| Type | 253 S3 FT |
| Description 1 | Cross-connectors round/round |
| Description 2 | no intermediate plate |
| Manufacturer | OBO |
| Dimension | 8-10mm |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 3400 |
| Unit of quantity | Piece |
| Weight | 23.3 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5092 kg CO2e / 1 Piece |


# Technical data sheet

## Cross-connector Rd 8−10 mm

## Item number: 5312592

### Dimensions






### Technical data

| | |
|---|---|
| Type of fastening screw | Hexagonal bolt |
| Type of connector | Cross-connectors |
| Lightning current carrying capacity | H/100 kA |
| Suitable for connection | Round conductor Rd 8–10 / Rd 8–10 |
| Fit | Rd 8-10 mm |
| ROHS-conformant | yes |
| Intermediate plate | no |