
Technical data sheet

Underfloor installation duct, 3-compartment, trunking height 38 mm
Item number: 7400328

Underfloor installation duct for laying cables under the floor.

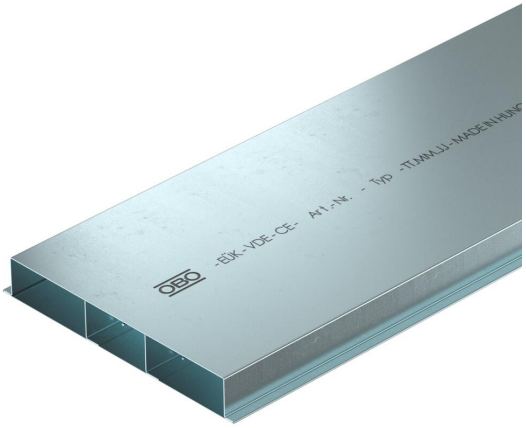

St	Steel
FS	Strip galvanised


Master data

Item number	7400328
Type	S3 25038
Description 1	Underfloor duct
Description 2	3 compartments
Manufacturer	OBO
Dimension	2000x250x38
Material	Steel
Surface	Strip galvanised
Surface standard	DIN EN 10346
Smallest sales unit	2
Unit of quantity	Metre
Weight	466 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	9,845 kg COe / 1 Meter

Technical data sheet

Underfloor installation duct, 3-compartment, trunking height 38 mm
Item number: 7400328

Dimensions

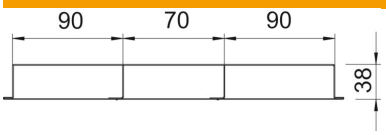

Length	2,000 mm
Width	250 mm
Height	38 mm
Dimension a	90 mm
Dimension b	70 mm
Dimension h	38 mm

Technical data

Number of fixed partitions	2
Number of compartments	3 St.
Mounting system fastening type	Floor
Floor plate	yes
Application area	Screed-covered
Decouplable	no
Duct height, min.	38 mm
Usable cross-section	8820 mm²
Removable cover	no
Cross-section, draw a	3168 mm²
Cross-section, draw b	2484 mm²
ROHS-conformant	yes