Technical data sheet

UTC3 with 3 protective contact sockets

Item number: 7404664



The ready-for-connection UTC3 universal support possesses three pre-installed 33° protective contact sockets of 16 A. Suitable for VL connection cables and device installation units of nominal size 2, 4, R4, 6 and R7. With WIELAND GST® connector system.

Master data


Item number	7404664
Type	UTC3 G W3
Description 1	Universal support ConnectGST18
Description 2	triple white
Manufacturer	OBO
Dimension	165x76x45
Smallest sales unit	1
Unit of quantity	Piece
Weight	19.78 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,7989 kg CO2e / 1 Piece


Technical data sheet

UTC3 with 3 protective contact sockets

Item number: 7404664

Dimensions

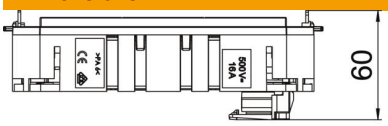

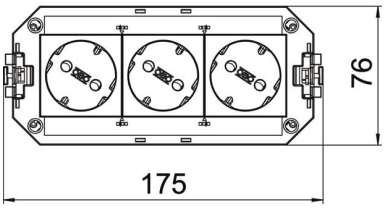

Length	175 mm
Width	76 mm
Height	60 mm

Technical data

Number of connections	1
Number of installable devices	3
Version for	Triple pure white
Cable length	0 mm
Line cross-section	2.5 mm²
Length of the supply cable	0 m
ROHS-conformant	yes
Socket combination	Triple
Plug-in system	GST18
Plug connector system, system-specific	yes
Circuit	1
System length	165 mm
Surge protection	no