Technical data sheet

UTC4 with 3 protective contact sockets

Item number: 7404680



The ready-for-connection UTC4 universal support possesses three pre-installed 33° protective contact sockets of 16 A and one blanking cover for retroinstallation of one installation device of the Modul 45 or Modul 45connect series. Suitable for VL connection cables and device installation units of nominal size R7, R9 and 9. With WIELAND GST® connector system.

Master data


Item number	7404680
Type	UTC4 G W3
Description 1	Universal support ConnectGST18
Description 2	triple white
Manufacturer	OBO
Dimension	208x76x45
Smallest sales unit	1
Unit of quantity	Piece
Weight	21.96 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,9389 kg CO2e / 1 Piece

Technical data sheet

UTC4 with 3 protective contact sockets

Item number: 7404680

Dimensions

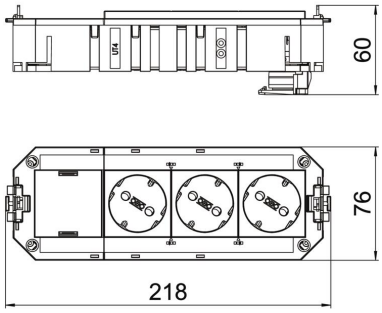

Length	208 mm
Width	76 mm
Height	56 mm

Technical data

Number of connections	1
Number of installable devices	4
Version for	Triple pure white
Cable length	0 mm
Line cross-section	2.5 mm²
ROHS-conformant	yes
Socket combination	Triple
Plug-in system	GST18
Plug connector system, system-specific	yes
Circuit	1
System length	208 mm
Surge protection	no