


Technical data sheet

Insulated lightning protection set, IR fastening

Item no. 5408980

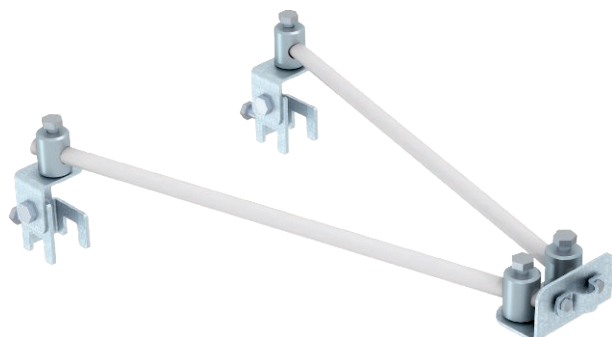


Fold fastening for an insulated air-termination unit at the separating distance s .

- Mounting on folds with a thickness of up to 20 mm
- For maintenance of the separation distance to electrically conductive parts according to VDE 0185-305-3 (IEC 62305-3)
- Acceptance of air-termination rods and round conductors with 8, 16 and 20 mm diameter
- UV-stabilised and weatherproof
- Continuous temperature range -50°C to +100°C
- Material factor $k_m = 0.7$

Master data

Item no.	5408980
Type	101 FS-16
Description 1	Iso-Combi set
Description 2	for fold fastening
Dimension	800x210x130
Smallest sales unit (VG)	1 Piece
Weight	235,50 kg/100 pc.

Technical data

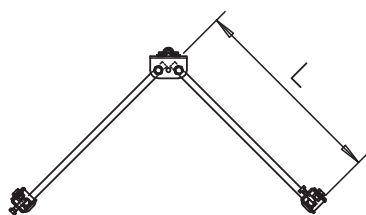

Dimension D	16,00 Ø mm
Dimension L	750,00 mm
Clamping range	4-20 mm

